



Above. Beyond. Always.

EZRVSOLUTIONS

RV Snap Trap® User Guide

Installation

IMPORTANT: The RV Snap Trap requires the use of a standard sewer hose support.

- 1) Pull away the minimum amount necessary of the sewer hose support to make room for the trap.
- 2) The trap may be installed at any point within the sewer hose support run to best suit the conditions and terrain of the campsite. The middle of the hose support run is most common.



Quarterly Holding Tank Clean-Out

A Quarterly clean-out (every 3 months) is recommended for grey holding tanks that have been left in the open valve condition and in continual use for extended periods of time.

- 1) Close the gate valve and pour approximately 2-3 ounces of Dawn Ultra® dish soap into any drain connected to the holding tank to be cleaned.
- 2) Under normal use, allow the holding tank to fill to approximately two-thirds full.
- 3) Allow the cleaning solution to work in the holding tank for a minimum of 24 hours.
- 4) Once the holding tank reaches two-thirds full or greater, open the gate valve and drain the tank completely.



Above. Beyond. Always.

EZRV SOLUTIONS

RV Snap Trap® User Guide

IMPORTANT: A heater and insulated cover must be applied to the RV Snap Trap for use in winter months. (See below for the parts required and where to purchase.)

Frost King 3' Electric Heat Cable 120 VAC

(Thermostat controlled – Will turn on automatically in freezing temps.)

Available from Home Depot and Amazon



Fitrite II Insulated Backflow Cover – Size: 16-1/2" W X 21" L (Velcro Sealed)

Available from Home Depot and Amazon





Above. Beyond. Always.

EZRVSOLUTIONS


RV Snap Trap® User Guide

Heater Installation

1) Leave a few inches of extra heater wire and begin to push the heater wire onto the trap pinching the middle of the double wire into the hose catch points on the RV Snap Trap.



2) Continue to push the wire onto the trap, working your way around the entire bottom edge.

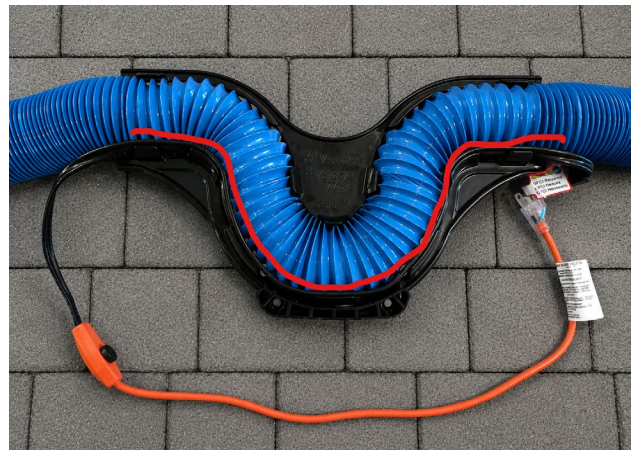



Above. Beyond. Always.

EZRVSOLUTIONS

RV Snap Trap® User Guide

Insulated Cover Installation

- 1) Install the insulated cover to the trap.



- 2) Place the trap into the sewer hose support run.

