



Above. Beyond. Always.

EZRVSOLUTIONS

RV Trap Shield™ User Guide

Installation

RV Trap Shield can be installed with or without RV Snap Trap®, and with or without a sewer hose support.


1. Pull away the minimum amount necessary of the sewer hose support to make room for the trap.
2. The trap may be installed at any point within the sewer hose support run to best suit the conditions and terrain of the campsite. The middle of the hose support run is most common.
3. Adjust leg height to the elevation of the sewer hose support or as desired for “Stand Alone” use.
4. Use the Velcro Straps to secure the sewer hose trap depth for “Stand Alone” use.
5. For RV’s with two hose connection ports, the RV Trap Shield must be installed after the “Y” fitting.



With RV Snap Trap® and Sewer Hose Support



With RV Snap Trap® in “Stand Alone” use

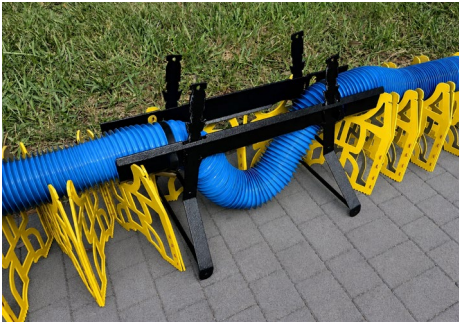

With Sewer Hose Support



RV Trap Shield in “Stand Alone” use

Quarterly Holding Tank Clean-Out

A Quarterly clean-out (every 3 months) is recommended for grey holding tanks that have been left in the open valve condition and in continual use for extended periods of time.

- 1) Close the gate valve and pour approximately 6-8 ounces of Dawn Ultra® dish soap into any drain connected to the holding tank to be cleaned.
- 2) Under normal use, allow the holding tank to fill to at least two-thirds full.
- 3) It is best if the cleaning solution can work in the holding tank for a minimum of 24 hours.
- 4) Once the holding tank reaches two-thirds full or greater, open the gate valve and drain the tank completely.